



**Valve 2/2 way - angle seat/process valve
Normally Closed - Flow direction below
the seat - pneumatically operated**

21IA4T15GC1-5

÷

21IA6T25GC1-5

PRESENTATION:


- High flow rate due to the angle seat configuration.
- Anti-water hammer feature with the fluid entry below the seat.
- Electrical operation is easy with the addition of a solenoid pilot.
- Stainless steel body and corrosion resistant actuator.
- The pneumatic actuator can be rotated through 360 degrees.
- Optical position indicator.
- Internal seals are self adjusting for long life.
- Easily convertible from N.C. to N.O. or double acting.
- Universal mounting - any mounting orientation is acceptable.

USE: Automation, Heating, Water, Hot water, Steam (180°C), Aggressive and food fluids

PIPES: G 1/2 - G 1

VALVE FEATURES:

Fluid Temperature - 10°C + 180°C
 Ambient temperature - 10°C + 60°C
 Material Stainless steel AISI series 316
 Seal PTFE
 Packing gland PTFE, FKM



PILOT ACTUATOR FEATURES:


Fluid Dry Air or lubricated, gas and neutral fluids
 Fluid Temperature max + 60°C
 Body AISI 316
 Gaskets NBR
 Actuator Ø 50

Pipe ISO 228/1	Code	Ø mm	Kv l/mn	Actuator pilot pressure (bar)		Differential pressure (bar)		Max. allowable pressure PS (bar)	Weight Kg
				min	max	min	max		
G 1/2	21IA4T15GC1-5	15	80	5	8	0	25	40	1,6
G 3/4	21IA5T20GC1-5	20	150				15		1,7
G 1	21IA6T25GC1-5	25	190				10		2,1

Note

Available on request pilot S.V. 31A3AV20+BDA (see catalogue page)
 Together with male thread nipple male G 1/8 - G 1/8
 Material compatibility with the fluids to be checked.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notification.

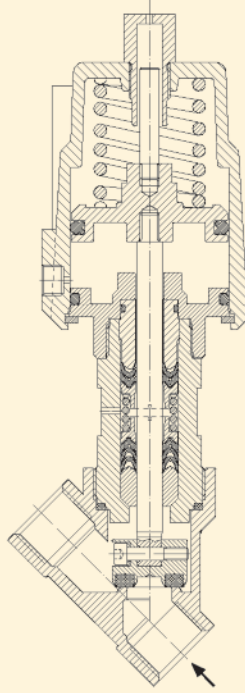

DIMENSIONS:

Pipe ISO 228/1	A mm	B mm	C mm	D mm	H mm	L mm	T mm
G 1/2	190,6	SW 27	156	15,4	139,7	65	17
G 3/4	190,8	SW 32	162	21,4	139,8	75	19
G 1	200,3	SW 41	168	25	146,6	90	20,5

